GREENMAX®
INTCO RECYCLING

TOTAL SOLUTION TO
EPS/STYROFOAM RECYCLING

FOAM HYDRAULIC COMPACTOR H-C300

Compression

Ratio up to

70：1

> 1.5 to 2 times than screw on compression density

> 2.simplicity of operator and easy to use

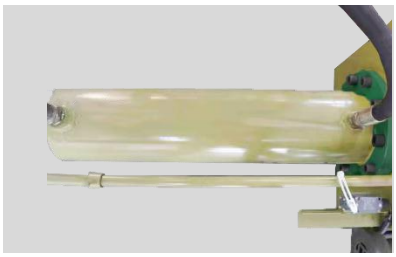

> 3.lower risk of melting

> APPLICABLE MATERIALS:

EPS	EPS DUST	PU	EPP

>DIMENSIONS

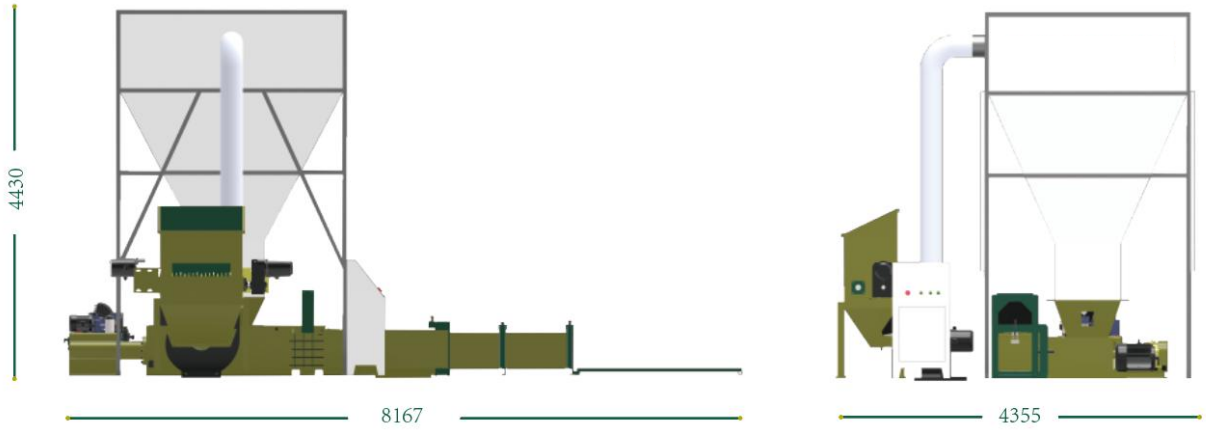

> TECHNICAL DATA

ITEM	H-C300	
Total Power Consumption	24.5kw	
Hydraulic Press Power	11kw	Both work at different time
Feeder Power	11kw	
Crusher Power	2*4kw	
Blower Power	5.5kw	
Production Capacity	200kg/h-300kg/h (depends on different kinds)	Varies depending on the material's density and humidity
EPS Compression Density	300-380kg/mmm	Varies depending on the material's density and humidity
EPS Compression Dimension	390*420(w/h)mm	
Feed Hopper Door	1200*800（l/w）mm	
Square Meters	8162*4355*4430(l/w/h)mm	
Weight	Approximately 3.5t	