

GREENMAX™ COMPACTOR POSEIDON C350



> Screw Compression Technology enables continuous output at a ratio of 8:1, high density and security, low utility consumption.



> Reputable & High quality components make the machine reliable and durable



> Water draining function squeezes out the liquid to the water collection tray.



> Water collection tray is made of acid-resistant stainless steel to withstand the low PH in many liquids.



> SIEMENS control system guarantees easy and simple operation.




> CE approved and comply with UL/CSA standards

> APPLICABLE MATERIAL:

	PET BOTTLES	ALUMINUM CANS	PE/PP FILM	BEVERAGE CARTONS	YOGURT CUPS
MATERIAL					
FEED IN /HOUR	12000pcs/0.5L 5000pcs/1.5L 4000pcs/2.0L 3000pcs/2.5L	12000pcs/0.33L	----	8000pcs/0.25L	20000pcs/0.1L
OUTPUT /HOUR	appr. 350kg 770 lbs	appr. 350kg 770 lbs	appr. 700-800kg 1543-1763 lbs	appr. 350kg 770 lbs	appr. 200kg 440 lbs

> DIMENSIONS

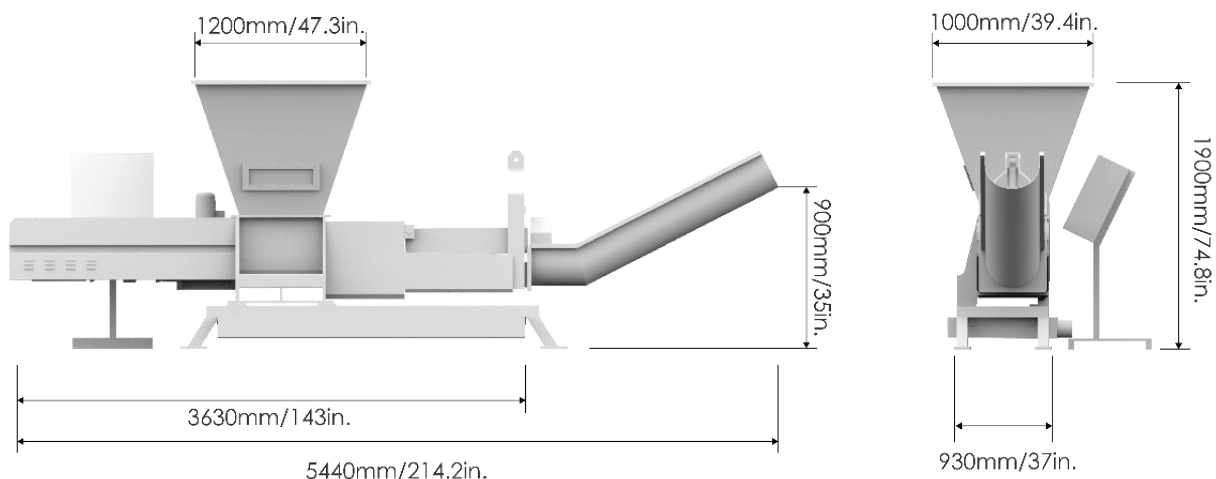

> TECHNICAL DATA

ITEM	P-C350
Total Power Consumption	15.55kw / 20.9hp
Screw Rotation Speed	30rad / min
Screw Reduction ratio	50:1
Bottle Volume Reduction	10:1
Compressed PET Density	250 kg/m ³ / 510 lbs/cubic yard
Feed Hopper Dimension	1200*1000 (l/w) mm / 47.2*39.4 (l/w) in.
Dimensions	5440*1000*1900(l/w/h) mm / 214.2*39.4*74.8(l/w/h) in.
Shipping Dimensions	Main part: 4400*1200*2090(l/w/h) mm / 173.2*47.2*82.3(l/w/h) in. Output chute: 2000*550*610(l/w/h) mm / 78.7*21.7*24.0(l/w/h) in.
Weight	2000kg / 4409lbs